




## USB Drop Test Fixture

Part No.: USB-TF-Drop

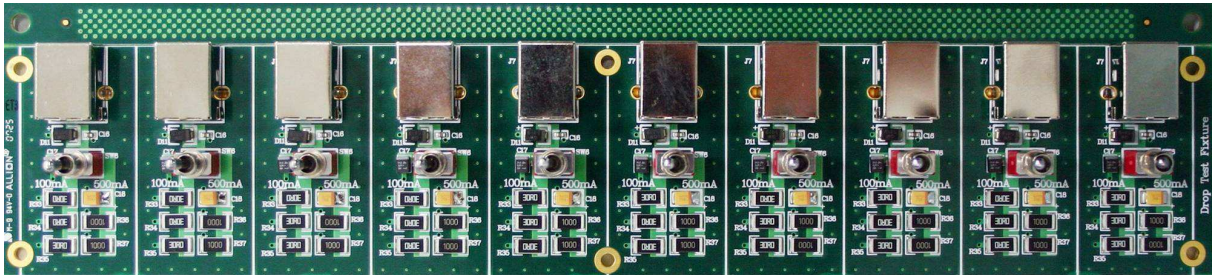

### Application

- Design for System and HUB Droop and Drop Test
- Related with “**USB-IF Full and Low Speed Electrical and Interoperability Compliance Test Procedure**” Revision 1.3 Section B.2.2
- Please don't 500mA loading on Bus-Powered Hub or System
- Please don't host Drop fixture with Hub or System over 5 minutes, resistance may become un-stable on high temperature
- Please don't touch resistance area to avoid scald

### Specification

- 50mm x 42mm x 1.4mm
- Standard USB Type B connector
- Operating Temperature 0° ~ 70° C
- Support 100mA and 500mA loading

#### Contact Information:

Fred Wu

Tel: +886-2-26557877 Ext: 1732

E-mail: [Fredwu@allion.com](mailto:Fredwu@allion.com)

<http://www.allion.com/TestTool/USB-test-tool.html>