




USB HS Sensitivity Test Fixture

Part No.: USB-TF-HS-ST

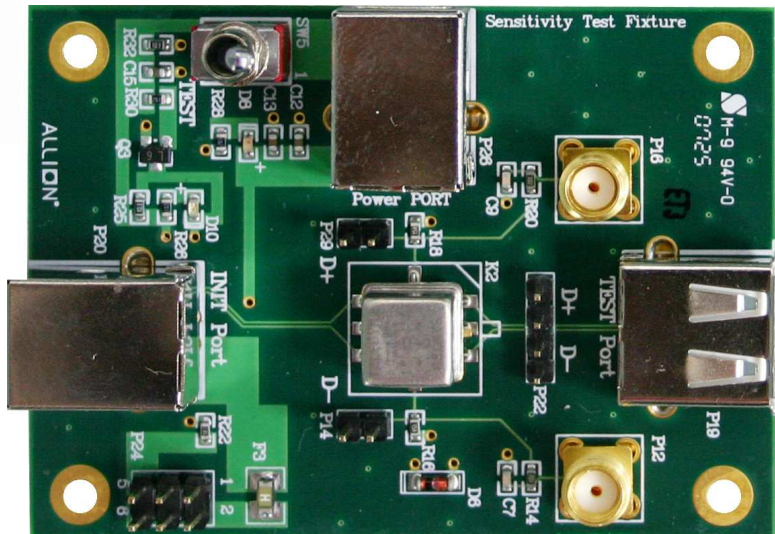

Application

- Design for High Speed Device Sensitivity Test (EL_16, 17 and 18)
- Related with “**USB-IF Device High-Speed Electrical Test Procedure**” Section 4.9
- Power Consumption: Normal Mode: 2mA Test Model: 88mA
- Can apply external power over USB cable from “Power Port”
- “INIT Port” is for link with Host, and “TEST Port” is for link with Device Under Test

Specification

- 70mm x 50mm x 1.4mm
- Operating Temperature 0° ~ 55° C

Contact Information:

Fred Wu

Tel: +886-2-26557877 Ext: 1732

E-mail: Fredwu@allion.com

<http://www.allion.com/TestTool/USB-test-tool.html>